

ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025, ISO 21930 and EN 15804+A2



A specific EPD for
Planed timber made of spruce u 16%



Owner of the declaration:
Holmen Wood Products
Bravikens S gverk
www.holmen.se

Program holder and publisher
The Norwegian EPD Foundation

Declaration number:
NEPD-4007-2855-EN

Product category /PCR:
Wood and wood-based products

Issue date: 06.12.2022
Valid to: 06.12.2027

EPD Software:

This EPD is based on IVL EPD Generator for the Sawmill products (NEPDT26) and follow the approved background database verification

General information

Product:

Planed timber made of spruce u 16%

Program Operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 23 08 80 00
Email: post@epd-norge.no

Declaration Number:

NEPD-4007-2855-EN

This declaration is based on Product

Category Rules:

CEN Standard EN 15804 A2 serves as core PCR and PCR Part B for wood and wood-based products for use in construction (NPCR 015 version 3.0, 10.04.2019).

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

Declared unit:

—

Declared unit with option:

1 m³ planed timber
A1-A5, B1-B7, C1-C4 and D

Functional unit:

—

Verification:

Independent verification of the declaration and data, according to ISO14025:2010.

Internal External

Third party verifier:



Linda Høibye, Life Cycle Assessment Consulting
Independent verifier approved by EPD Norway

Owner of the declaration and manufacturer:

Holmen Wood Products AB
Contact person: Marit Bohlin
Phone: 070-3206562
Email: marit.bohlin@holmen.com

Place of production:

Bravikens sågverk
Braviken, Sverige

Management system:

ISO 9001, 14001, 50001, FSC, PEFC

Organisation no:

556099-0672

Issue date:

06.12.2022

Valid to:

06.12.2027

Year of study:

2021


Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

The EPD has been worked out by:

Marit Bohlin, Arne Gabrielsson, Per Lundgren
Holmen Wood Products

Approved by:



Håkon Hauan
(Managing Director EPD Norway)

Product

Product description:

Planed timber is used for structural purposes, cladding and as component in wood based products. The average moisture ratio of the declared products is 16 % (EN 14298). On request, timber with a different moisture content can be delivered.

Product specification:

Planed timber is produced in different size and the declared product is representative for the average planed timber produced by the sawmill and a mix of pine and spruce. Difference on GWP-Fossil A1-3 caused by a mix of tree species is less than 4% compared to individual specie.

| Materials, product | kg/m ³ | % |
|---------------------|-------------------|------|
| Spruce/whitewood | 467 | 100% |
| Pine/redwood | 0 | 0% |
| Sum | 467 | 100% |
| Packaging materials | kg/m ³ | % |
| Wood | 1.90 | 84% |
| Polyethene wrap | 0.25 | 11% |
| Nylon strap | 0.10 | 5% |
| Steel strip | 0 | 0% |
| Cardboard | 0 | 0% |
| Sum | 2.25 | 100% |

Technical data:

Planed timber is delivered according to qualities and sizes specified by demands on different markets. For the European market, the European EN standard and the Swedish publication SS-EN 1611-1/A "Appearance grading of softwoods – European spruces, firs, pines, Douglas fir and larches" are typically applicable.

The raw dry mass for spruce is 384 kg/m³ and 420 kg/m³ for pine as Swedish averages and used here to calculate biogenic carbon content and the delivery density including water according to the

Market:

Main markets are Sweden and Northern Europe.

Reference service life:

Reference service life is normally the same as the building when not exposed for weathering, which is typically set to 50 or 60 years.



Use QR code for **fact sheet** on sawn timber.

LCA: Calculation rules


Declared unit:

1 m³ planed timber

System boundary:

Flow chart for the production (A3) are shown below, while the rest of the modules are shown on page 5. Module A4 to D is further explained in the scenario section.

Figure 1 Manufacturing and transport to a customer and the remaining lifecycle.

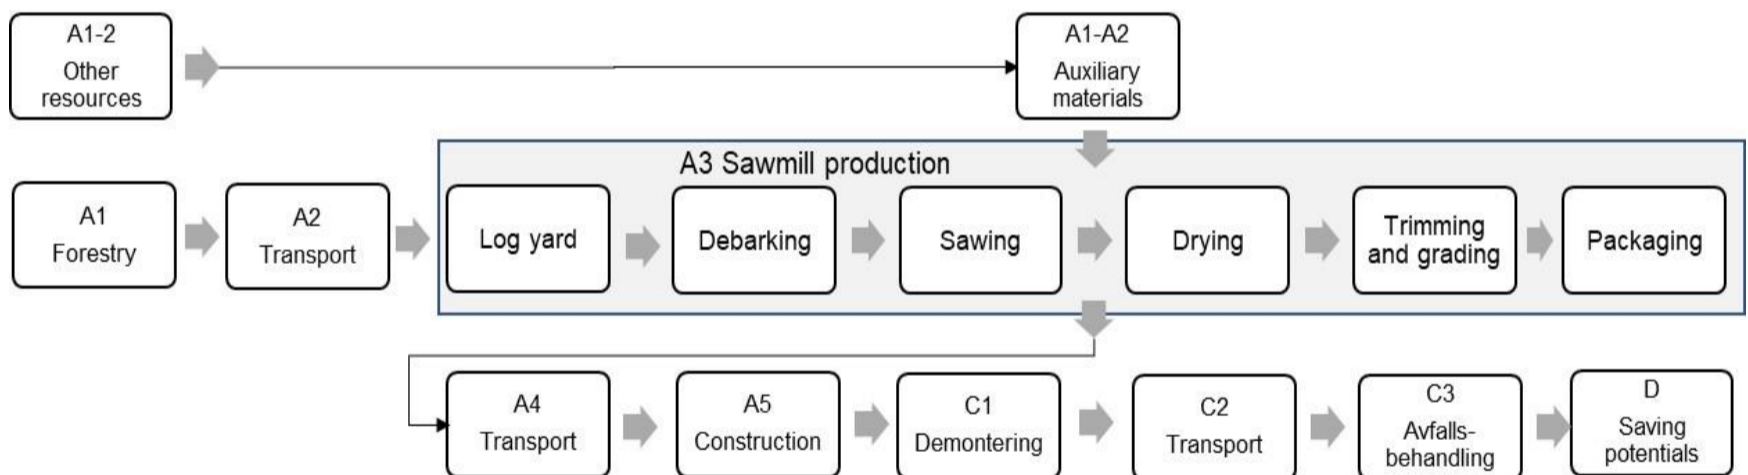

Data quality:

The sawmill process and transport use specific LCA data and national representative figures is used for the forestry. Generic upstream data for energy wares and small amount of auxiliary materials are mainly from Gabi (age 2017-2022).

Allocation:

The allocation is made in accordance with the provisions of EN15804. All impact from the planning of boards are allocated to the main product. The shaving are sold and only attributed to its upstream impact from its previously processes. The sawmill and its multiple co-products are allocated based on their different economic values, except the drying process that is attributed to the intermediate product on physical premises. The economic value of the different parts of the input round timber are attributed using the market value of its final products/co-products.

A conservative approach is used for transport of round timber to the sawmill based on economic allocation factors (module A2).

A conservative economic allocation approach is used for forestry products, where no impact is allocated to the tops and branches (GROT), except forestry operations aimed for GROT (forwarding and shipping). Indicator result on potential soil quality (SQP) is assessed based on national characterisation factors for Swedish forestry (Horn et al 2021).

Cut-off criteria:

All major raw materials and all the essential energy used are included. All production process are included, hence the few limited cut off that occurs (<<1%) related to packaging materials that is not substituted in module D. This cut-off rule does not apply for hazardous materials and substances. Inherent biogenic carbon and stored energy in packaging material is balanced out directly.

Calculation of biogenic carbon content:

Sequestration (module A1) and emissions of biogenic carbon are calculated according to EN16485:2014/EN15804+A2, where the net biogenic carbon cycle A to C is zero (i.e. carbon dioxide neutral). In this EPD, the amount of biogenic carbon stored in the product (module A3) is reported additionally (according to EN 15804 A2) as biogenic carbon stored in the product (see table 'Resource use'). For biogenic carbon in all other modules after A3, the carbon in the products is assigned to the module where the emission occurs in order to support the modularity principle in EN15804, so the net result is zero. Biogenic carbon and energy stored in packaging materials (less than 5 weight-%) are directly balanced out and therefore not visible in the environmental indicator result.

LCA: Scenarios and additional technical information

The following information below describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)

| Type | Load factor, % (90+0%) | Type of vehicle | Distance | Fuel | Value |
|--------------|------------------------|----------------------|----------|-------------|-------|
| Semi-trailer | 0.45 | TT/AT 28-34 + 34-40t | 100 | 0.027 l/tkm | 2.7 |

A4: The transportation is reported as 100 km and shall be used as factor to estimate the actual distance to the specific object.

Assembly (A5)

| | Unit | Value |
|--------------------------------|------|---------|
| Material loss | % | 5 |
| Crane, electricity consumption | kWh | 2.8E-02 |
| Front loader, diesel | kWh | 2.7E-01 |

A5: At the construction site, 4 minutes of work with front loader is assumed

Use (B1)

| | Unit | Value |
|-----|------|-------|
| MND | | |

Maintenance (B2)/Repair (B3)

| | Unit | Value |
|-----|------|-------|
| MND | | |

The declared product is not assumed to be exposed for weather and for that reason no maintenance is needed during the service life.

Replacement (B4)/Refurbishment (B5)

| | Unit | Value |
|-----|------|-------|
| MND | | |

Operational energy (B6) and water consumption (B7)

| | Unit | Value |
|-----|------|-------|
| MND | | |

No operational energy used during service life.

End of Life (C1, C3, C4)*

| | Unit | Value |
|---------------------------------|------|-------|
| C1: Demolition machine (diesel) | kWh | 0.51 |
| C3: To material reuse | kg | 0 |
| C3: To material recycling | kg | 0 |
| C3: To energy recovery | kg | 467 |
| C3: Wood chipping (diesel) | kWh | 2.8 |
| C4: To landfill | kg | 0 |

Energy need for demolition (C1) and chipping (C3) of the wooden discard products is found in according to Erlandsson et al (2015). The scenario accounts for 100%* energy recovery and end of waste is reached in C3. No statistics exist in Sweden on recycling of demolition wood but will likely be at least 90%.

Transport to waste processing (C2)*

| Type | Load factor, % (90+0%) | Type of vehicle | Distance | Fuel | Value |
|-------------------|------------------------|--------------------|----------|-------|-------|
| Large lorry/truck | 45% | TT/AT 14-20+20-28t | 35 | 0.037 | 1.3 |

*C2: Assumed transport from demolition site to local waste treatment site, from where it is then sold.

The transport assume empty return.

Benefits and loads beyond the system boundaries (D)*

| | Unit | Value |
|---|--------|-------|
| Chipped CLT that substitute fuel in a district heating plant | kg, DM | 403 |
| Chipped discard product that substitute average used fuel in a district heating plant | MJ | -7729 |

D: The chipped product is assumed to be used as fuel in a district heating and then replaces the average energy mix.

* If less recycling rate than 100% is asked for shall the result from module C and D be multiplied by such factor that takes the actual number into account. 100% is used here to support the modular approach of using these figures on the buildings level.

Additional technical information

No additional information given.

LCA: Results

The LCA results are presented for the declared unit defined on page 2 of the EPD document. EN 15804 exists in two versions and version 2 is the latest.

System boundaries: **X**=included, **MND**= module not declared, **MNR**=module not relevant.

| Product stage | | | Construction process stage | | Use stage | | | | | | | End of life stage | | | | Beyond the system boundary |
|---------------|-----------|---------------|----------------------------|------------------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|----------------------------|
| Raw materials | Transport | Manufacturing | Transport | Construction, installation process | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| x | x | x | x | x | MND | MND | MND | MND | MND | MND | MND | x | x | x | x | x |
| SE | SE | SE | SE | SE | — | — | — | — | — | — | — | SE | SE | SE | SE | SE |

Core environmental impact, version A2 – mandatory indicators

| Parameter | Unit | A1-3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|----------------------------|------------------------|-----------|----------|-----------|-----------|----------|----------|----------|-----------|
| GWP-total | kg CO ₂ e | -7.06E+02 | 2.73E+00 | 1.80E+00 | 1.55E-01 | 1.41E+00 | 7.39E+02 | 0.00E+00 | 1.01E+02 |
| GWP-fossil | kg CO ₂ e | 3.50E+01 | 2.73E+00 | 1.95E+00 | 1.54E-01 | 1.40E+00 | 6.46E-01 | 0.00E+00 | -1.88E+02 |
| GWP-biogenic | kg CO ₂ e | -7.41E+02 | 0.00E+00 | -1.65E-01 | -2.00E-04 | 4.36E-03 | 7.38E+02 | 0.00E+00 | 2.89E+02 |
| GWP-LULUC | kg CO ₂ e | 1.98E-01 | 5.65E-08 | 1.10E-02 | 1.28E-03 | 7.83E-03 | 3.61E-03 | 0.00E+00 | 0.00E+00 |
| GWP-IOBC/GHG ¹⁾ | kg CO ₂ e | 3.51E+01 | 2.80E+00 | 1.96E+00 | 1.53E-01 | 1.41E+00 | 6.52E-01 | 0.00E+00 | -1.62E+02 |
| ODP | kg CFC11 eq. | 4.15E-07 | 6.27E-08 | 2.53E-08 | 1.99E-17 | 3.16E-08 | 1.46E-08 | 0.00E+00 | -9.93E-07 |
| AP | mol H ⁺ eq. | 3.46E-01 | 3.13E-02 | 1.96E-02 | 8.98E-04 | 1.58E-02 | 7.28E-03 | 0.00E+00 | -4.12E-01 |
| EP-freshwater | kg P eq. | 1.78E-03 | 1.44E-04 | 9.96E-05 | 4.63E-07 | 7.25E-05 | 3.34E-05 | 0.00E+00 | -5.21E-04 |
| EP-marine | kg N eq. | 1.63E-01 | 1.69E-02 | 9.35E-03 | 4.40E-04 | 8.50E-03 | 3.92E-03 | 0.00E+00 | -8.13E-03 |
| EP-terrestrial | mol N eq. | 1.52E+00 | 1.60E-01 | 8.77E-02 | 4.87E-03 | 8.07E-02 | 3.72E-02 | 0.00E+00 | 7.29E-02 |
| POCP | kg NMVOC eq. | 3.09E-01 | 2.19E-02 | 1.70E-02 | 8.47E-04 | 1.10E-02 | 5.09E-03 | 0.00E+00 | 5.84E-01 |
| ADP-m&m ²⁾ | kg NMVOC eq. | 2.01E-05 | 1.50E-06 | 1.12E-06 | 1.19E-08 | 7.55E-07 | 3.48E-07 | 0.00E+00 | -1.21E+03 |
| ADP-fossil ²⁾ | kg NMVOC eq. | 7.49E+02 | 4.23E+01 | 4.06E+01 | 2.08E+00 | 2.13E+01 | 9.84E+00 | 0.00E+00 | -5.94E-01 |
| WDP | kg NMVOC eq. | 3.10E+02 | 4.98E+01 | 1.91E+01 | 1.35E-03 | 2.51E+01 | 1.16E+01 | 0.00E+00 | -5.66E+00 |

GWP-total: Global Warming Potential; **GWP-fossil:** Global Warming Potential fossil fuels; **GWP-biogenic:** Global Warming Potential biogenic; **GWP-LULUC:** Global Warming Potential land use and land use change; **ODP:** Depletion potential of the stratospheric ozone layer; **AP:** Acidification potential, Accumulated Exceedance; **EP-freshwater:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-terrestrial:** Eutrophication potential, Accumulated Exceedance; **POCP:** Formation potential of tropospheric ozone; **ADP-m&m:** Abiotic depletion potential for non-fossil resources (**minerals and metals**); **ADP-fossil:** Abiotic depletion potential for fossil resources; **WDP:** Water deprivation potential, deprivation weighted water consumption

Note 1 – This additional indicator **GWP-GHG/IOBC** is also referred to as **GWP-GHG** in context of Swedish and Finnish legislation.

Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Additional environmental impact, version A2 – addition of non-mandatory indicators with poor reliability^{1) 2)}

| Parameter | Unit | A1-3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|----------------------|-------------------|----------|----------|----------|----------|----------|----------|----------|-----------|
| PM ²⁾ | Disease incidence | 2.00E-06 | 1.68E-07 | 1.12E-07 | 3.13E-09 | 8.46E-08 | 3.90E-08 | 0.00E+00 | -5.11E+01 |
| IRP ¹⁾ | kBq U235 eq | 1.27E+01 | 9.53E-02 | 6.47E-01 | 3.60E-04 | 4.81E-02 | 2.22E-02 | 0.00E+00 | -2.53E-07 |
| ETP-fw ²⁾ | CTUe | 7.50E+02 | 7.40E+01 | 4.29E+01 | 1.50E+00 | 3.73E+01 | 1.72E+01 | 0.00E+00 | -1.88E+02 |
| HTP-c ²⁾ | CTUh | 2.66E-08 | 1.48E-09 | 1.44E-09 | 3.03E-11 | 7.46E-10 | 3.44E-10 | 0.00E+00 | -1.91E-01 |
| HTP-nc ²⁾ | CTUh | 1.74E-06 | 9.04E-08 | 9.38E-08 | 1.68E-09 | 4.56E-08 | 2.10E-08 | 0.00E+00 | -2.32E+00 |
| SQP ²⁾ | Dimensionless | 6.29E+04 | 5.42E+01 | 3.15E+03 | 7.13E-01 | 2.73E+01 | 1.26E+01 | 0.00E+00 | -2.98E+03 |

PM: Particulate matter emissions; **IRP:** Ionising radiation, human health; **ETP-fw:** Ecotoxicity (freshwater); **ETP-c:** Human toxicity, cancer effects; **HTP-nc:** Human toxicity, non-cancer effects; **SQP:** Land use related impacts / soil quality

Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Environmental impact, version A1

| Parameter | Unit | A1-3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|-----------|------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|----------|-----------|
| GWP-TOT | kg CO ₂ e | -7.04E+02 | 2.73E+00 | 1.90E+00 | 1.52E-01 | 1.38E+00 | 7.39E+02 | 0.00E+00 | -1.69E+02 |
| GWP-IOBC* | kg CO ₂ e | 3.40E+01 | 2.73E+00 | 1.90E+00 | 1.52E-01 | 1.38E+00 | 6.35E-01 | 0.00E+00 | -1.69E+02 |
| ODP | kg CFC11 e | 3.80E-07 | 5.65E-08 | 2.31E-08 | 2.66E-17 | 2.85E-08 | 1.31E-08 | 0.00E+00 | -9.93E-07 |
| POCP** | kg C ₂ H ₄ e | 5.69E-04 | -5.61E-03 | -3.78E-04 | -2.35E-04 | -2.83E-03 | -1.31E-03 | 0.00E+00 | 1.01E-02 |
| AP | kg SO ₂ e | 2.40E-01 | 2.01E-02 | 1.35E-02 | 6.12E-04 | 1.02E-02 | 4.68E-03 | 0.00E+00 | -3.93E-01 |
| EP | kg PO ₄ ³⁻ e | 5.69E-04 | -5.61E-03 | 4.44E-03 | 1.54E-04 | 3.93E-03 | 1.81E-03 | 0.00E+00 | -3.07E-03 |
| ADPM | kg Sb e | 2.08E-05 | 1.50E-06 | 1.15E-06 | 1.19E-08 | 7.56E-07 | 3.49E-07 | 0.00E+00 | -2.40E-05 |
| ADPE | MJ | 4.90E+02 | 4.11E+01 | 2.75E+01 | 2.07E+00 | 2.07E+01 | 9.57E+00 | 0.00E+00 | -1.21E+03 |

**LCI origin from GaBi database separates NO_x into NO and NO₂, in combination with the applied characterization model with a marginal approach for POCP

GWP Global warming potential; **ODP** Depletion potential of the stratospheric ozone layer; **POCP** Formation potential of tropospheric photochemical oxidants; **AP** Acidification potential of land and water; **EP** Eutrophication potential; **ADPM** Abiotic depletion potential for non fossil resources; **ADPE** Abiotic depletion potential for fossil resources.

* Also referred to as **GWP-GHG** in context of e.g. Swedish and Finish legislation.

Resource use, version A1+2 — mandatory indicators

| Parameter | Unit | A1-3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|-----------|----------------|----------|----------|----------|----------|----------|-----------|----------|-----------|
| RPEE | MJ | 1.16E+03 | 1.45E+01 | 5.90E+01 | 1.16E-01 | 7.33E+00 | 3.38E+00 | 0.00E+00 | 3.66E+03 |
| RPEM | MJ | 7.77E+03 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | -7.77E+03 | 0.00E+00 | 0.00E+00 |
| TPE | MJ | 8.92E+03 | 1.45E+01 | 5.90E+01 | 1.16E-01 | 7.33E+00 | -7.76E+03 | 0.00E+00 | 3.66E+03 |
| NRPE | MJ | 7.50E+02 | 4.24E+01 | 4.07E+01 | 2.08E+00 | 2.14E+01 | 9.86E+00 | 0.00E+00 | -1.80E+03 |
| NRPM | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| TRPE | MJ | 7.50E+02 | 4.24E+01 | 4.07E+01 | 2.08E+00 | 2.14E+01 | 9.86E+00 | 0.00E+00 | -1.80E+03 |
| SM | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| RSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| NRSF | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | -1.86E+03 |
| W | m ³ | 7.64E+00 | 1.16E+00 | 4.66E-01 | 1.33E-04 | 5.86E-01 | 2.70E-01 | 0.00E+00 | -8.27E+01 |

RPEE Renewable primary energy resources used as energy carrier; **RPEM** Renewable primary energy resources used as raw materials; **TPE** Total use of renewable primary energy resources; **NRPE** Non renewable primary energy resources used as energy carrier; **NRPM** Non renewable primary energy resources used as materials; **TRPE** Total use of non renewable primary energy resources; **SM** Use of secondary materials; **RSF** Use of renewable secondary fuels; **NRSF** Use of non renewable secondary fuels; **W** Use of net fresh water.

Energy stored as material in the packaging materials is direct balanced out in the module it arise and stored in the product is balanced out over the life cycle. exactly the same as stored biogenic carbon is reported in GWP

End of life — Waste, version A1+2 — mandatory indicators

| Parameter | Unit | A1-3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|-----------|------|----------|----------|----------|----------|----------|----------|----------|-----------|
| HW | kg | 5.74E-02 | 1.79E-10 | 2.87E-03 | 1.05E-10 | 9.01E-11 | 4.15E-11 | 0.00E+00 | -2.55E-07 |
| NHW | kg | 1.05E+00 | 5.35E-03 | 5.27E-02 | 3.09E-04 | 2.70E-03 | 1.24E-03 | 0.00E+00 | -3.50E+00 |
| RW | kg | 1.05E-01 | 4.59E-05 | 5.29E-03 | 2.51E-06 | 2.32E-05 | 1.07E-05 | 0.00E+00 | -2.37E-01 |

HW Hazardous waste disposed; **NHW** Non hazardous waste disposed; **RW** Radioactive waste disposed

End of life — Output flow, version A1+2 — mandatory indicators

| Parameter | Unit | A1-3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
|-----------|------|----------|----------|----------|----------|----------|----------|----------|----------|
| CR | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| MR | kg | 3.81E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| MER | kg | 8.91E-03 | 0.00E+00 | 2.25E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| EEE | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| ETE | MJ | 1.15E-01 | 0.00E+00 | 5.74E-03 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

CR Components for reuse; **MR** Materials for recycling; **MER** Materials for energy recovery; **EEE** Exported electric energy; **ETE** Exported thermal energy

Information describing the biogenic carbon content at the factory gate

| Biogenic carbon content | Amount | Unit |
|---|--------|------|
| Biogenic carbon content in product | 201 | kg C |
| Biogenic carbon content in the accompanying packaging | 0 | kg C |

44/12 is the ratio between the molecular mass of CO₂ and C molecules.

The carbon and its energy content stored in packaging materials is less than 5% and therefore according to EN 15804 direct balanced out in the environmental indicator result.

Additional Norwegian requirements

Greenhouse gas emission from the use of electricity in the manufacturing phase

Swedish national production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

| Data source | Amount | Unit |
|---|--------|--------------------------|
| Energywares Gabi and end energymix ENSTO-E 2016 | 0.042 | kg CO ₂ e/kWh |

Dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.
- The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- The product contain dangerous substances, more then 0,1% by weight, given by the REACH Candidate List or the Norwegian Priority list, see table.
- The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskiten, Annex III), see table below.

| Name | CAS no. | Amount |
|------|---------|--------|
| — | — | — |

Indoor environment

Not relevant

Carbon footprint

Carbon footprint according to ISO 14067 has not been worked out for the product.

Bibliography

| | |
|-------------------------------------|---|
| ISO 14025:2006 | Environmental labels and declarations - Type III environmental declarations - Principles and procedures. |
| ISO 14044:2006+A1:2017+A2:2020 | Environmental management - Life cycle assessment - Requirements and guidelines. |
| EN 15804:2012+A1:2013 | Sustainability of construction works — Environmental product declaration — Core rules for the product category of construction products. |
| EN 15804:2012+A2:2019 | Sustainability of construction works — Environmental product declaration — Core rules for the product category of construction products. |
| ISO 21930:2007 | Sustainability in building construction — Environmental declaration of building products. |
| NPCR 015 version 3.0 | PCR Part B for wood and woodbased products for use in construction (10.04.2019). |
| Erlandsson M, Peterson D: | Klimatpåverkan för byggnader med olika energiprestanda. Underlagsrapport till kontrollstation 2015. För Energimyndigheten och Boverket. IVL Svenska Miljöinstitutet, rapport nr U5176, 27 maj 2015, första version daterad 10 maj 2015. |
| Horn et al | Land use and forestry in the environmental footprint. Fraunhofer Institute for Building Physics IBP et al, carried out on behalf of Cepi. Stuttgart, 2021-09-29. |
| Erlandsson M | Generic LCA report for the EPD generator: Sawmill products – As the basis for the publication of EPDs within EPD Norway. Version 1.1, IVL, (rev Sept 2022) January 2022. |
| Bohlin M, Gabrielsson A, Lundgren P | Supplementary LCA report for Holmen Wood Products AB, Planned timber u16%. Sep |
| Lundström J | Energy consumption for different frame materials during the production phase of an apartment building. Diploma work, HT2016, BY1704, Umeå University. |



Program operator and publisher

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo
Norway

Phone: +47 23 08 80 00

e-mail: post@epd-norge.no

web www.epd-norge.no



Owner of the declaration

Holmen Wood Products AB
Bravikens sågverk

Phone: +46 (0) 650 28 000

web www.holmen.com



Author of the Life Cycle Assessment

Martin Erlandsson
IVL Swedish Environmental Res. Inst.

Phone: +46 (0) 10-788 65 00

web www.ivl.se



ECO Platform

ECO Platform
ECO Portal

+46 (0) 10-788 65 00

web www.eco-platform.org

web ECO Portal

EPD for the best environmental decision



Global
Program
Operator